

G. P. Reeves Inc.

12764 Greenly Street Holland, MI 49424

Phone: 888.399.8893 Fax: 616.399.8867

Web Site: <http://gpreeves.com>

LUBE LOGIC®


SS7000-1001

Conveyor Lubricator

- Reduces downtime and manual labor in lubricating conveyor
- Automatically squirts measured shots of lubricant into chain wheels and knuckles
- DOESN'T DRIP – has check valve at end of each nozzle
- Keeps conveyor from surging and product from swaying
- Uses ALL LUBRICANTS from “dry film” (ISO 2) through “synthetic oil” (ISO 100)
- Lubricant output volume for each nozzle is independently adjustable from .003 to .03 cc


Lubricator for Webb Unibilt power and free (Uni/Uni) overhead conveyor

Lubricator Module

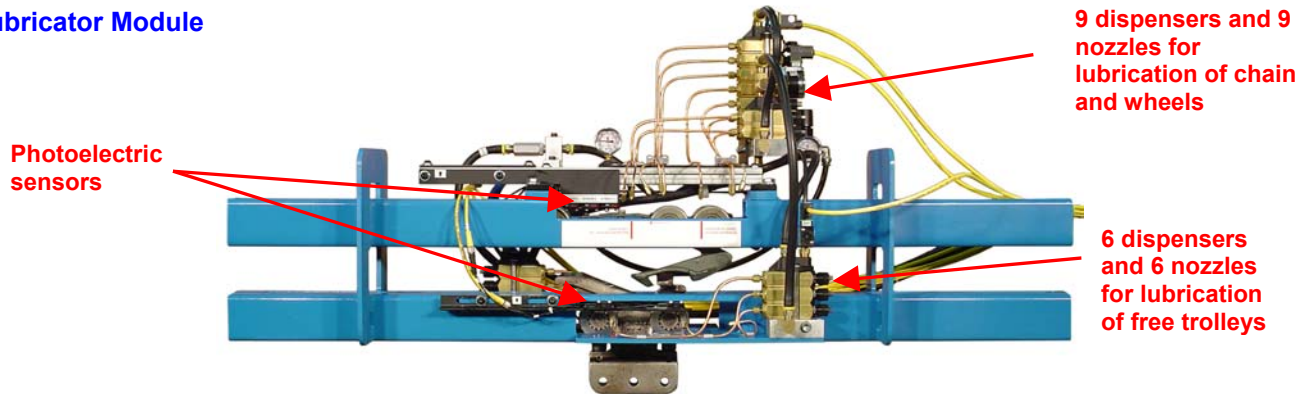

Hoses and cords are included for connection between modules

Reservoir/Pump/Controller Module

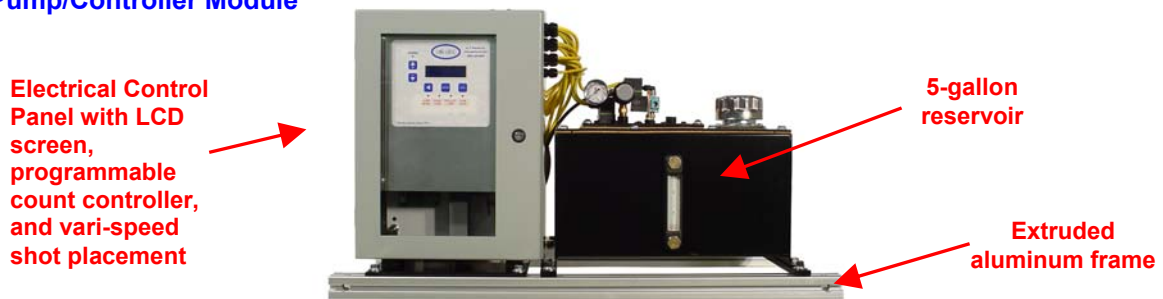

SS7000-1001 pneumatic shot lubricator for Uni/Uni power and free conveyor has fifteen nozzles and each nozzle has a check valve and a machined orifice tip. Nine nozzles lubricate load wheels, guide wheels, four-wheel pusher wheels, and universal joints of the power chain and six nozzles lubricate the four wheels and two guide rollers of the free trolleys. Lubricator will also have a 5-gallon reservoir with low level warning light, empty shut off switch, and integral recirculation pump, microprocessor with programmable count controller in NEMA 12 enclosure and with interface panel, eleven positive displacement adjustable measuring dispensers, and five non-contact sensors. Lubricator requires a minimum of 60 p.s.i. compressed air and 120/240 v.a.c. 50/60 Hz for operation and will be mounted on user supplied 48" long power and free track section. Lubricant volume for each dispenser is adjustable from .003 cc minimum to .03 cc maximum per shot and lubricator is designed for lubricants with viscosities from ISO 2 to ISO 100 (dry-film to SAE 30) that are compatible with Viton seals. Lubricator will operate at conveyor speeds of up to 80 feet per minute and with chain travel in either direction. Reservoir/controller is designed to be mounted separate from conveyor and 8 ft. long air tubing, lubricant supply and return lines, and sensor cords will be included. Price includes installation supervision and start up assistance and training in continental USA.

G. P. Reeves Inc.

Copyright 2007

Serving Industry Since 1971