

G. P. Reeves Inc.

12764 Greenly Street Holland, MI 49424


Phone: 888.399.8893 Fax: 616.399.8867
 Web Site: <http://gpreeves.com>

LUBE LOGIC®

GPMD1600 Oil Dispenser


Nose-mountable air-operated single-acting metered shot oil dispenser

- Accurate repetitive dispensing of 0.1 to 1.25 cubic centimeter shots
- Dispenser can mount onto any 1/4 NPT female port
- Swivel outlet fitting facilitates installation and mounting
- Nose mounted – requires no special manifold or base
- Operates with “shop” compressed air using a 3-way air valve
- Dispenses via positive displacement and includes simple stroke adjustment

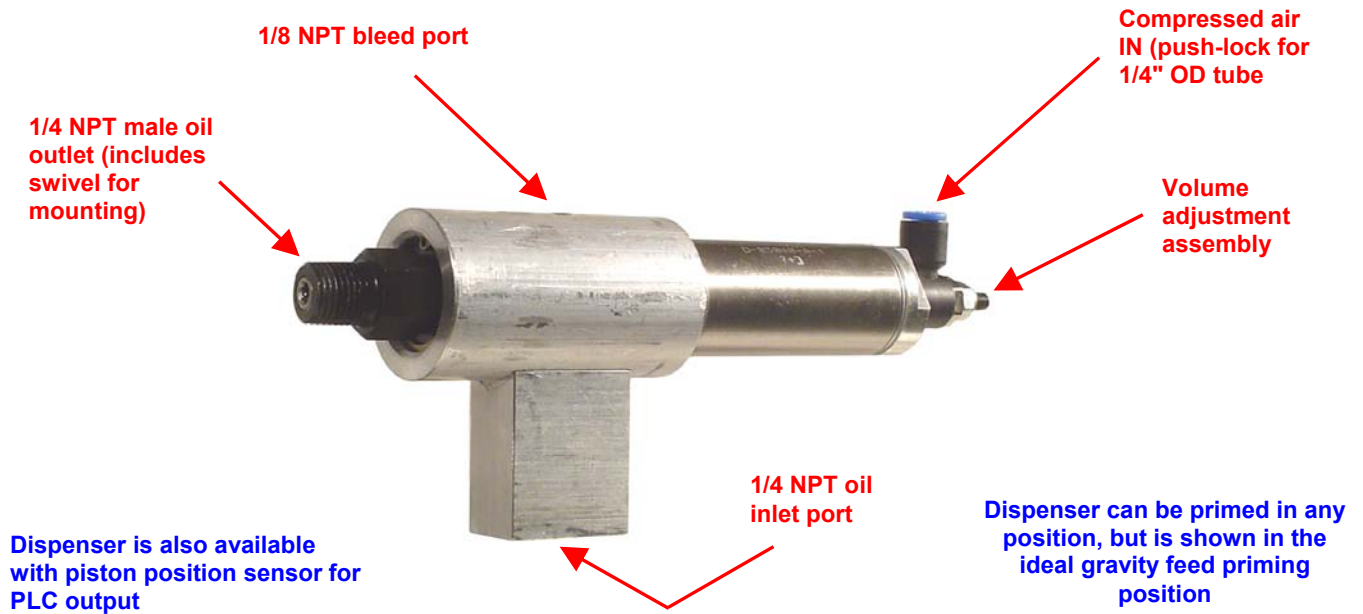

GPMD1600 is shown below assembled to KA6009 nozzle

DESCRIPTION

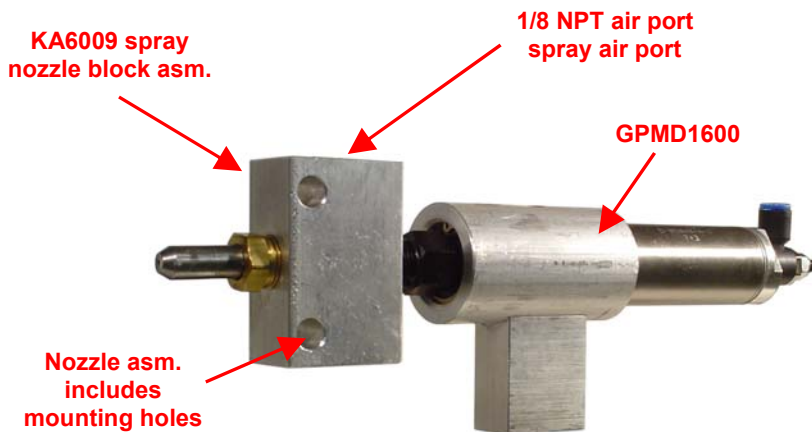

Air operated positive displacement adjustable oil dispenser for use with gravity feed or low pressure supply has output that is adjustable from 0.10 cc minimum to 1.25 cc maximum. This dispenser is nose mounted and uses a swivel for easy installation. The compressed air inlet is push-lock for 1/4" tubing and oil outlet is 1/4 NPT male. Boost ratio is 9 to 1. Inlet check valve cracks at 12" WC for use with gravity oil supply. Outlet check valve cracks at 50 p.s.i. for use with low pressure oil supply.